

Simplecom®

RT100 Rechargeable
2.4G Wireless Remote Air Mouse

User Manual



Simplify Your Life

Features

- 2.4Ghz Wireless Air-Mouse with Nano USB Receiver
- Built-in Rechargeable Li-ion Battery
- QWERTY keyboard allows for convenient typing
- Operates Smoothly with Advanced Gyroscope System
- Compatible with Android, Windows, Mac and Linux


Applications

RT100 combines remote control, mouse and keyboard into one device. Providing a unique and capable tool to operate their PC, smart TV, android TV box, media player. It is widely used for:

- Controlling presentations, teaching, and lecturing with larger screen or projector up to 10m
- Anyone who wants to control their computers from the comfort of their couch
- The full QWERTY keyboard allows for convenient typing from the same device

With the USB 2.0 receiver, you can be sure that the device is compatible with all of your devices including Windows, Mac, Android, and Linux.

Product

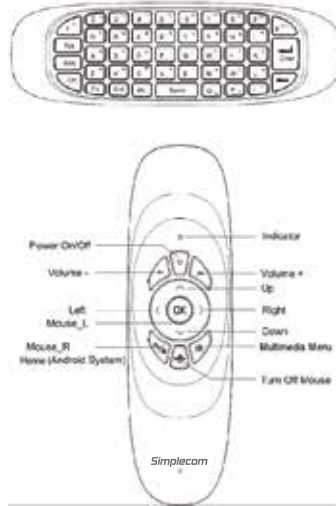

Specifications

Acceleration Sensor	3 axis gyroscope
Communication	2.4 Ghz
Working Distance	10m
Frequency	2.400-2.483Ghz
Working Current	<<20mA
Standby Current	<<20uA
Battery	Rechargeable Lithium battery
Indicator	1 LED indicator
Product Size	151*45*14mm (L*B*H)
Receiver Size	18.58*14.59*6.7mm (L*B*H) USB receiver
Weight	65g
USB	USB2.0
System	Windows, Mac OS, Linux, Android

How to Use

Step 1: Take out the USB Nano receiver from the package. Plug the USB Nano receiver into the USB port. The system will automatically install the driver software and the air mouse will be ready for use.

Step 2: Control the mouse cursor on the device by moving the mouse in the air. The exact movement of the mouse controls the direction of the pointer.

Note: You can turn the mouse pointer off by pressing the "Turn off mouse" button. Press again to resume using the gyro function

Auto Sleep and Low Power

After 20 seconds the remote will go into standby mode. To wake the device, press any key. When using the remote controller, the green indicator turns off, it means that power is low, please charge the battery with micro USB Cable.

Troubleshooting

Re-Pairing the Remote Control

If the remote control does not work and the green indicator begins blinking when the USB receiver is correctly plugged in you can solve this problem by re-pairing the device.

Keep the distance between the remote control and the pc within 1M and put the remote on a flat surface Hold the "Vol Down" and "Mouse Toggle" keys for 3 seconds, the green indicator starts blinking quickly When the green indicator stops blinking and become steady, the pairing is completed.

Re-Sync the Remote Control

If the cursor sometimes floats (or drags), hold the "Mouse R/Home" and "Menu" buttons at the same time for 3 seconds to re-sync the controller. The indicator will begin blinking quickly. Set the remote down and keep the remote control absolutely still while the remote syncs to the USB receiver. When the indicator flashes rapidly, the remote has been re-synced.

Mouse cursor doesn't move

You may turn the mouse pointer off by pressing the "Turn off mouse" button. Press again to resume using the gyro function.

Working distance

Working distance is about 10m and will be affected by obstructing objects such as walls.

Package Contents

RT100 Remote	1Pcs
USB Nano Receiver	1Pcs
Micro USB Charging Cable	1Pcs
User Manual	1Pcs

Warranty

1 Year Limited Warranty

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

For our assistance with regards to warranty please email to support@simplecom.com.au or create a support ticket at <http://www.simplecom.com.au>

© Simplecom Australia All Rights Reserved. Simplecom is a registered trademark of Simplecom Australia Pty Ltd. All other trademarks are property of their respective owner. Specifications and external appearance are subject to change without notice. Warranty and technical support covering this product are only valid in the country or region of purchase.

www.simplecom.com.au support@simplecom.com.au