


**Simplecom®**

SE515 NVMe/SATA M.2 SSD  
to USB-C Enclosure

User Manual

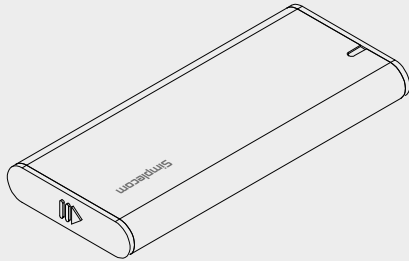

*Simplify Your Life*

*Simplify Your Life*

[www.simplecom.com.au](http://www.simplecom.com.au)

© Simplecom Australia All Rights Reserved. Simplecom is a registered trademark of Simplecom Australia Pty Ltd. All other trademarks are property of their respective owner. Specifications and external appearance are subject to change without notice. Warranty and technical support covering this product are only valid in the country or region of purchase.

[www.simplecom.com.au](http://www.simplecom.com.au) [support@simplecom.com.au](mailto:support@simplecom.com.au)

## | Specifications

- Model: SE515
- Name: NVMe/SATA M.2 SSD to USB-C Enclosure
- Interface: USB-C (USB 3.2 Gen 2)
- Dimension: 94x40x10mm (LxWxH)
- Compatible SSD: NVMe and SATA M.2 SSD
- Compatible M.2 size: 2230 / 2242 / 2260 / 2280

## | Features


- Dual Protocol support for both NVMe and SATA M.2 SSD
- Convert any M.2 SSD (M Key, B+M Key) to a USB portable drive
- Premium aluminium exterior with small, portable design
- USB 3.2 Gen 2 interface up to 10Gbps\* transfer rate
- Tool Free design allow to mount M.2 SSD in seconds without tools
- Plug and play, no drivers required
- Compatible with Windows 7 and above, Mac OS 10.4 and above

## | Package Contents


SE515 Dual Protocol M.2 SSD Enclosure	1Pcs
USB-C to USB-C Cable	1Pcs
USB-C to USB-A Cable	1Pcs

## | Installation


1. To open the enclosure, sliding the side cover




2. Sliding tray out after you unlock the side cover

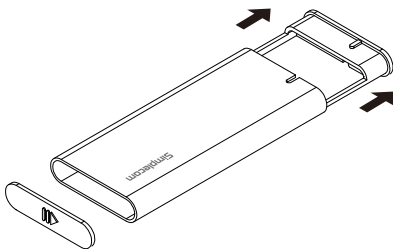

3. Insert M.2 SSD to the M.2 connector on the tray, and secure it with standoff



4. Lock the tray after M.2 SSD installed



5. Connect the USB cable to enclosure and computer, you may need to format or assign a drive letter before using

\*SE515 supports both NVMe and SATA based M.2 SSD (M Key or B+M Key), bandwidth will be limited to 6Gbps when using SATA M.2 SSD, as maximum transfer rate of SATA M.2 SSD is 6Gbps

## | Safely Disconnect

Windows: Double-click on the Safely Remove icon in your Windows System Tray. This will launch the Safely Remove program. Then click on the device you wish to remove and click on the Stop button.

Mac: In Mac OS the drive appears as an icon on the desktop. Before unplugging the drive, it needs to be dismounted by dragging the drive to the Trash Can, once the activity light has gone out, you can safely remove the drive.

## | Warranty

This product includes one (1) year repair/replacement warranty provide by Simplecom Australia. This warranty is non-transferable and is limited to the original purchaser.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

For our assistance with regards to warranty please email to [support@simplecom.com.au](mailto:support@simplecom.com.au) or create a support ticket at <http://www.simplecom.com.au>